

RMX-1216-G55

Measuring Receiver - with Bluetooth


Type	RMX-1216-G55
Applications	Cold Chain Logistics
Sensors	4x External Digital DS18B or Dry contact (note: two glands standard)
Accuracy	See datasheet from sensors
Resolution	0.1°C
Memory	18 725 samples
Operating temperature	-40°C to +80°C
Storage temperature	-40°C to +85°C
Power	12/24V DC power via cable (EU and International power plug versions available)
Protection class	IP 40
Housing	Flame Retardant ABS UL94-V0
Dimensions	83x81x60mm
Weight	200 g (including adapter)
Radio Frequency	2,4 GHz [Bluetooth]
Wireless	Bluetooth: Class2
Antenna	PCB antenna [Bluetooth]

All specifications in this document are subject to change without prior notice

rmoni
Quality. In Control

Highlights

Permanent automatic temperature monitoring
Designed for transport applications
Up to four external DIGITAL temperature or door sensors; can be calibrated
Receiver for board computers with logging
Bluetooth serial connection to On Board Unit (e.g. Webfleet LINK, Tablet etc.)
Compact and robust for easy installation under dashboard

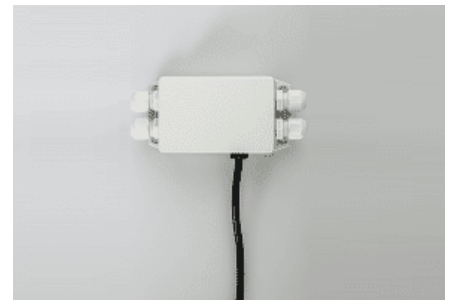

More information

BELGIUM

T +32 89 51 50 12

M info@rmoni.com

THE NETHERLANDS

T +31 74 265 77 87

M info@rmoni.com

rmoni

Raise your quality
standards with Rmoni